

DES-P42M

6Port 100M PoE Switch with Build-in Power Adapter

4*FE POE+2*FE RJ45 PoE Switch



Introduction


The DES-P42M series is a 10/100Mun managed PoE switch. It has 4*10/100M PoE ports and 2*10/100M uplink RJ45 ports. Port1-4can support IEEE802.3af/at standard PoE power supply, and single port PoE power reaches 30W.The maximum PoE output power is 60W.As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable.

It can supply power toPOE terminal equipment such as wireless AP, web cam, VoIP, visual intelligent building intercomt hrough network cable,and meet the network environment that needs high-densityPoE power supply. It is suitable for hotel,campus, factory dor mitory and small and medium-sized enterprises.

Highlights

- ☆ 4*10/100M POE +2*100M RJ45 Port PoE Switch,1-4ports support af/at;
- ☆ Comply with IEEE802.3, IEEE802.3us tandards;
- ☆ With a DIP switch,the second gear is used independently, no need to restart the power supply, and can be enabled with the dial,all ports support the portAI-watch dog function by default,7x24 detection port access device status,the restate of crash or fake crash,the POE power supply of the port will be restarted, the fault will be cleared automatically, and the manual maintenance-cost will be avoided.
- ☆ E: 1-4port, Extend 300 meters transmission with limit 10Mbps.
- ☆ V: 1-4 Port support each port Isolation & VLAN;
- ☆ PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power:30W/port;
- ☆ Supports POE devices such as wireless access points (APs) and network surveillance cameras through Category5/6 Ethernet cables; power is15.4W/port,Maximum power:30W/port;
- ☆ The power supply total is 60W;
- ☆ 1 years warranty.

DIEMENSION

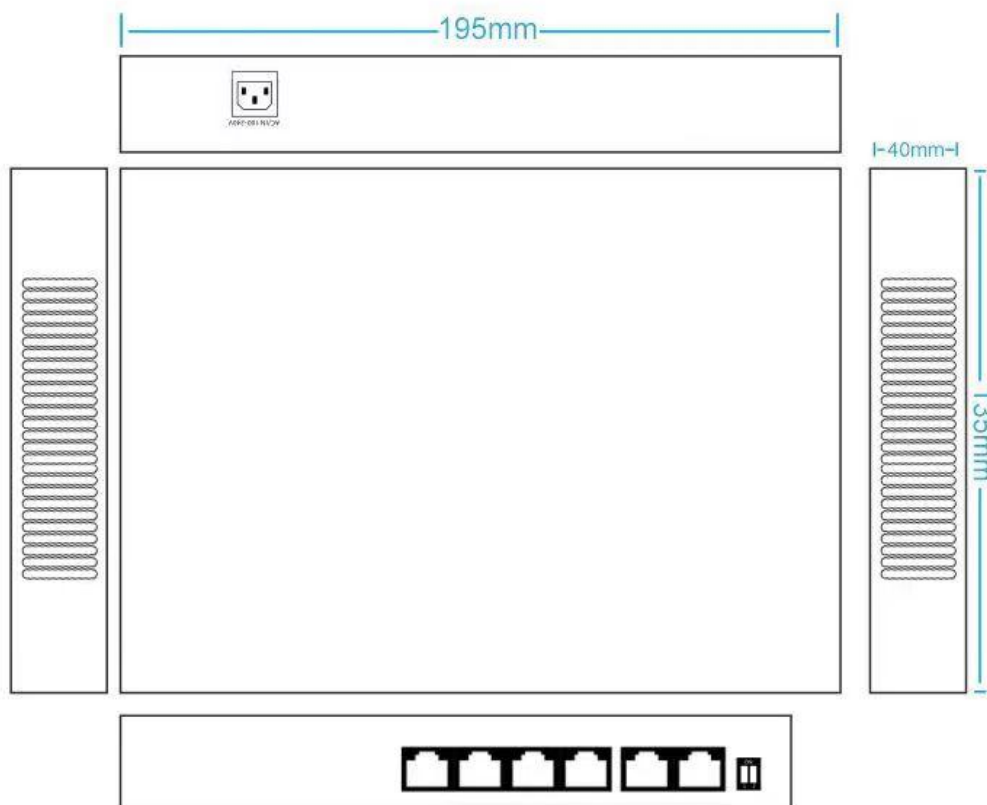

Technical Specification-

MODEL	DES-P42m
Fixed Port	4*10/100Base-T/TX PoE ports (Data/Power) 2*10/100Base-T/TX Uplink RJ45 ports (Data)
POE Port	Port 1-4 support PoE
Feature	With the Dial code switch, support port priority by default. E: AI Extend 300meters transmission and auto speed change of single port (limit 10Mbps), other ports maintain 100M/1000M within 100 meters; V: Turn on, 1-4 Port support each port Isolation & VLAN; D: Turn on, 1-4 Port support AI-PoE Network self-healing mode (PoE Watchdog function), Automatic solve the camera problem & reduce after-sale.
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3x.
Ethernet Port Feature	10/100Base-T(X) automatic detection, full/half Duplex MDI/MDI-X adaptive
Fiber Port Feature	Store and Forwards
Switching Capacity	1.2Gbps
Forwarding Mode	0.89Mpps
MAC	2K
Buffer Memory	768K
Twisted Pair Transmission	10BASE-T:Cat5 UTP(≤300 meter) 100BASE-TX:Cat5 or later UTP(≤100 meter)
Power Supply Pin	Default 1/2(+), 3/6(-);
MAX / AVERAGE Power Per Port	30W/15.4W
Total PWR / Input Voltage	60W (52VAC)
Power Consumption	Standby:<2W;Full load:<60W
LED Indicator	Power indicator: PWR (Green); Network indicator: 1-4(Link/Act)/ (Green),5-6(Link/Act)/ (Green),
Power Supply	Build-in power adaptor AC100~240V 50-60Hz,65W
Operation TEMP / Humidity	-20~+55°C:5%~90% RH non condensing
Storage TEMP / Humidity	-40~+75°C;5%~95% RH non condensing
Dimension	195*135*40mm

Net /Gross Weight	<0.8kg / <1.2kg
Installation Method	desktop type, wall mounted
Protection	IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-5(Lightning protection/Surge): Power:CM±4kV/DM±2kV; Port: ±4kV
Protection level	IP30
Certification	CCC;CE mark, commercial;CE/LVD EN60950; FCC Part 15 Class B;RoHS
Warranty	1 years, lifetime maintenance.

Applications-

DASSCOM



PACKING LIST

CONTENT	QTY	UNIT
6 Ports 100M PoE Switch with build-in Power Adapter DES-P42M	1	SET
User Guide	1	PC
Warranty Card	1	PC